

2SK2194  
(F15W50VX2)

500V 15A

FEATURES

- Input capacitance (Ciss) is small.  
Especially, input capacitance at 0 bias is small.
- The static Rds(on) is small.
- The switching time is fast.

APPLICATION


- Switching power supply of AC 100V input
- High voltage power supply
- Inverter

RATINGS

●Absolute Maximum Ratings (Tc = 25°C)

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T <sub>stg</sub>		-55~150	°C
Channel Temperature	T <sub>ch</sub>		150	
Drain-Source Voltage	V <sub>DSS</sub>		500	V
Gate-Source Voltage	V <sub>GSS</sub>		±30	
Continuous Drain Current (DC)	I <sub>D</sub>		15	A
Continuous Drain Current (Peak)	I <sub>DP</sub>		45	
Continuous Source Current (DC)	I <sub>S</sub>		15	
Total Power Dissipation	P <sub>T</sub>		110	W
Single Pulse Avalanche Current	I <sub>AS</sub>	T <sub>ch</sub> = 25°C	15	A
Mounting Torque	TOR	( Recommended torque : 0.5N·m )	0.8	N·m

OUTLINE DIMENSIONS

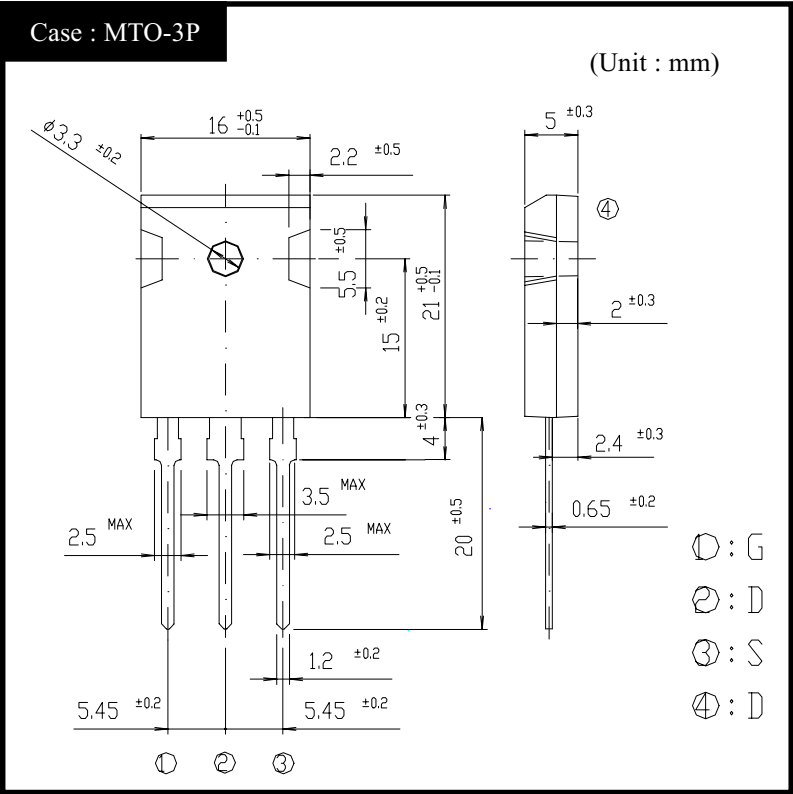


●Electrical Characteristics  $T_c = 25^{\circ}\text{C}$


Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$I_D = 1\text{mA}$ , $V_{GS} = 0\text{V}$	500			V
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS} = 500\text{V}$ , $V_{GS} = 0\text{V}$			250	$\mu\text{A}$
Gate-Source Leakage Current	$I_{GSS}$	$V_{GS} = \pm 30\text{V}$ , $V_{DS} = 0\text{V}$			$\pm 0.1$	
Forward Transconductance	$g_{fs}$	$I_D = 7.5\text{A}$ , $V_{DS} = 10\text{V}$	4.5	10		S
Static Drain-Source On-state Resistance	$R_{DS(ON)}$	$I_D = 7.5\text{A}$ , $V_{GS} = 10\text{V}$		0.35	0.45	$\Omega$
Gate Threshold Voltage	$V_{TH}$	$I_D = 1\text{mA}$ , $V_{DS} = 10\text{V}$	2.5	3.0	3.5	V
Source-Drain Diode Forwade Voltage	$V_{SD}$	$I_S = 7.5\text{A}$ , $V_{GS} = 0\text{V}$			1.5	
Thermal Resistance	$\theta_{jc}$	junction to case			1.13	$^{\circ}\text{C/W}$
Total Gate Charge	$Q_g$	$V_{DD} = 400\text{V}$ , $V_{GS} = 10\text{V}$ , $I_D = 15\text{A}$		65		nC
Input Capacitance	$C_{iss}$	$V_{DS} = 10\text{V}$ , $V_{GS} = 0\text{V}$ , $f = 1\text{MHz}$		1900		pF
Reverse Transfer Capacitance	$C_{rss}$			135		
Output Capacitance	$C_{oss}$			400		
Turn-On Time	$t_{on}$	$I_D = 7.5\text{A}$ , $V_{GS} = 10\text{V}$ , $R_L = 20\Omega$		110	180	ns
Turn-Off Time	$t_{off}$			270	440	

2SK2194


Transfer Characteristics

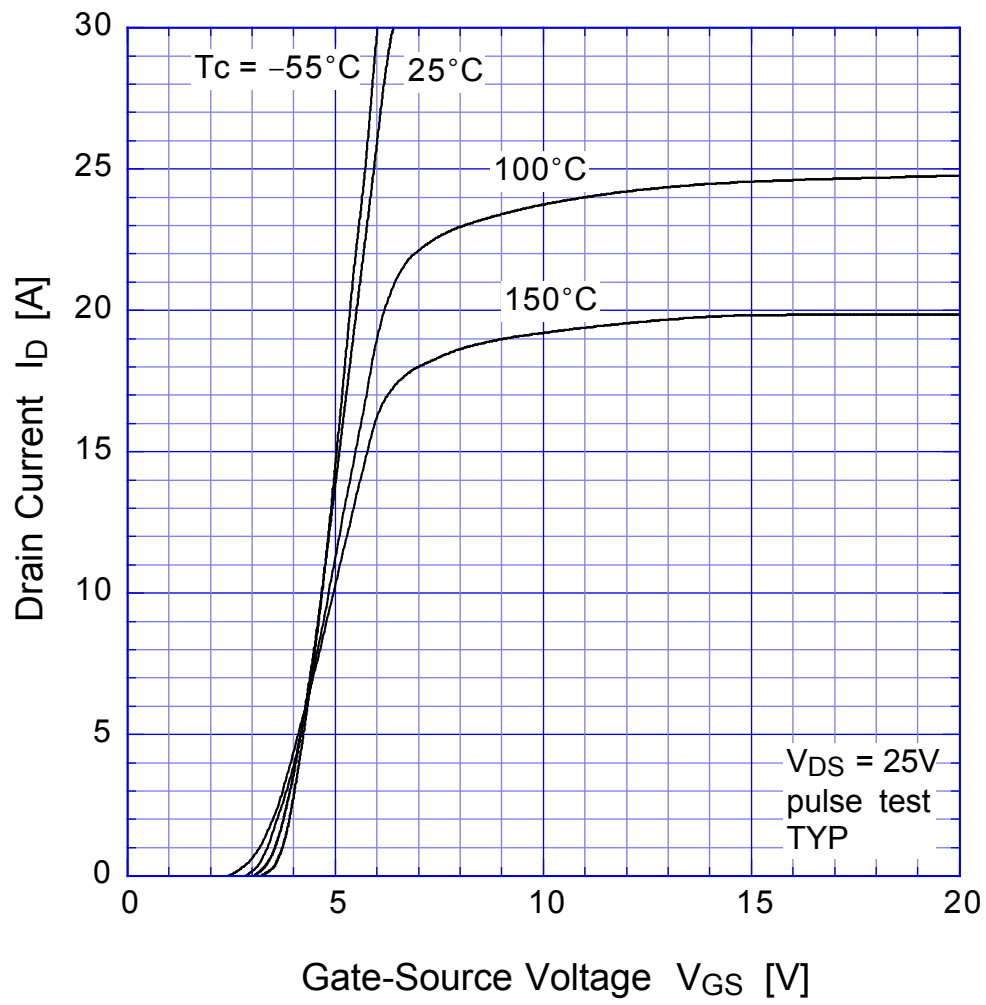

## 2SK2194 Static Drain-Source On-state Resistance

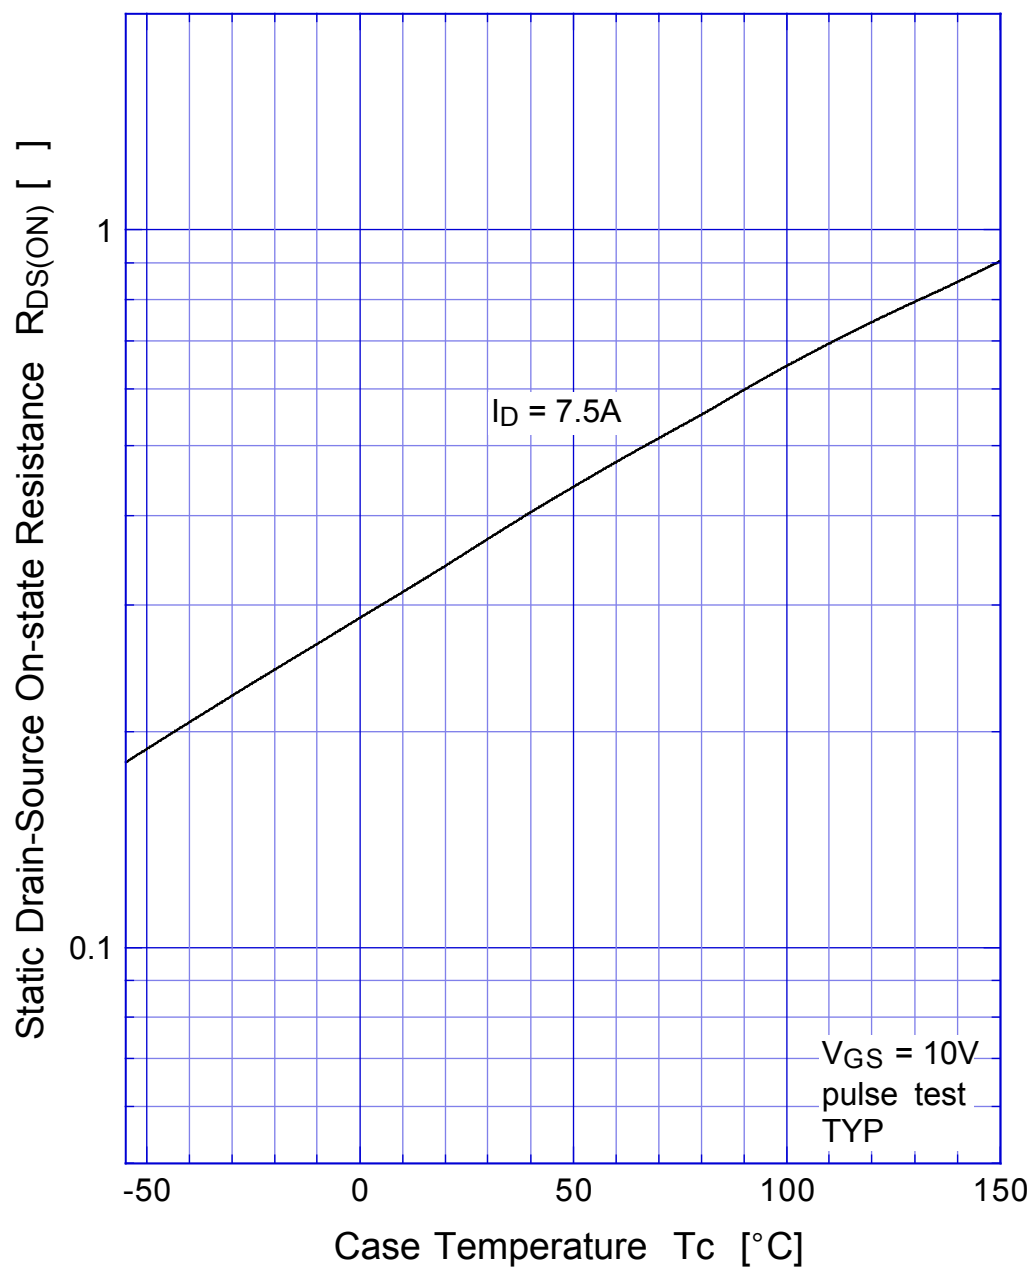


## 2SK2194 Gate Threshold Voltage

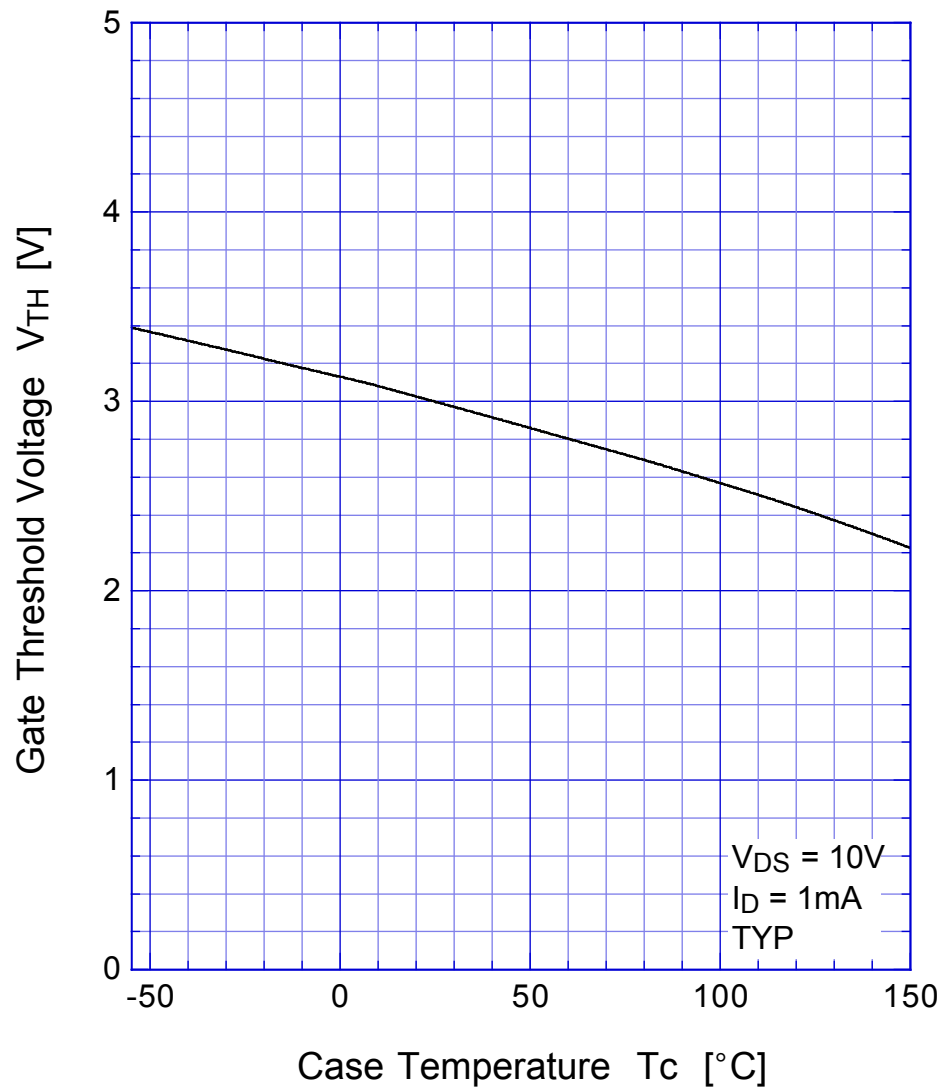


2SK2194


Safe Operating Area

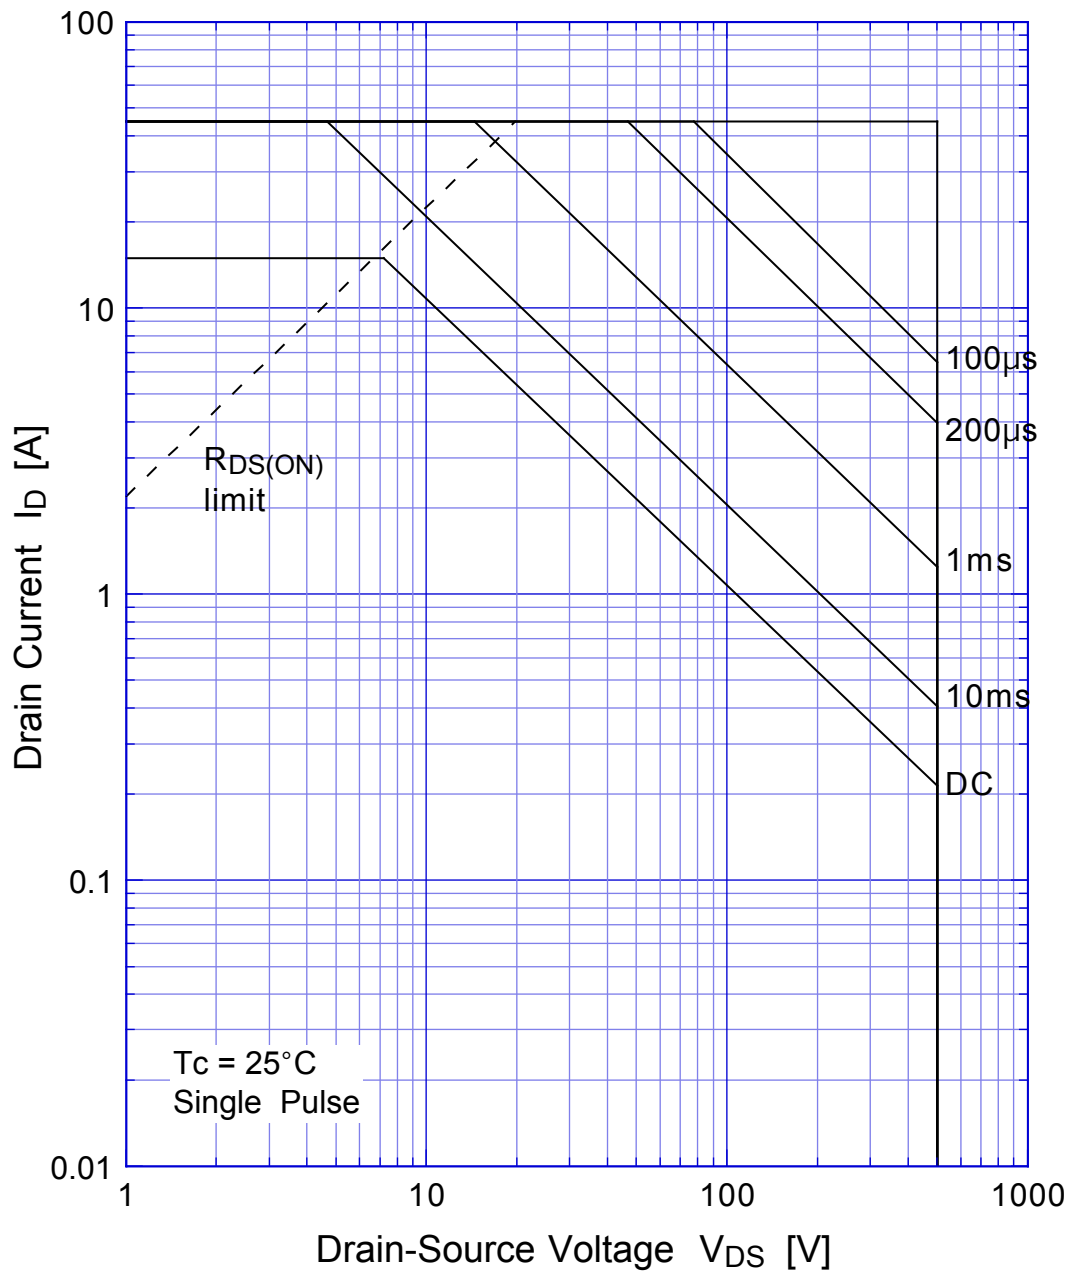

## 2SK2194      Transient Thermal Impedance

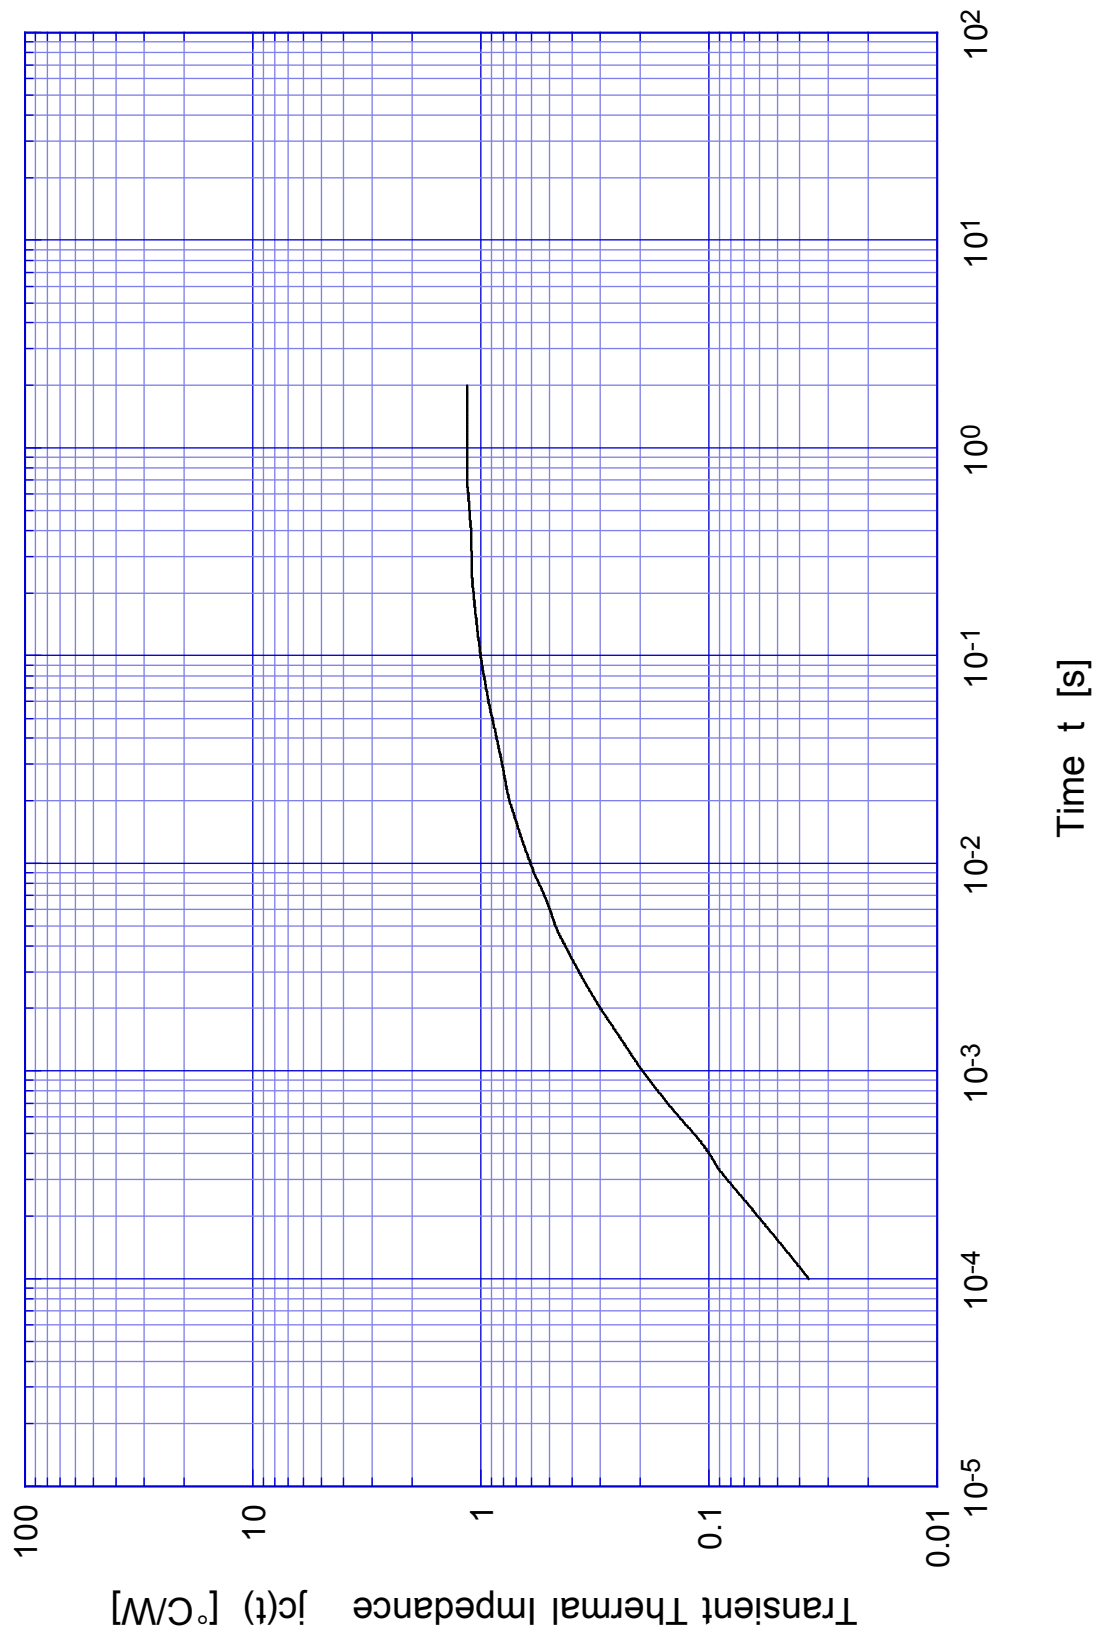


2SK2194 Capacitance

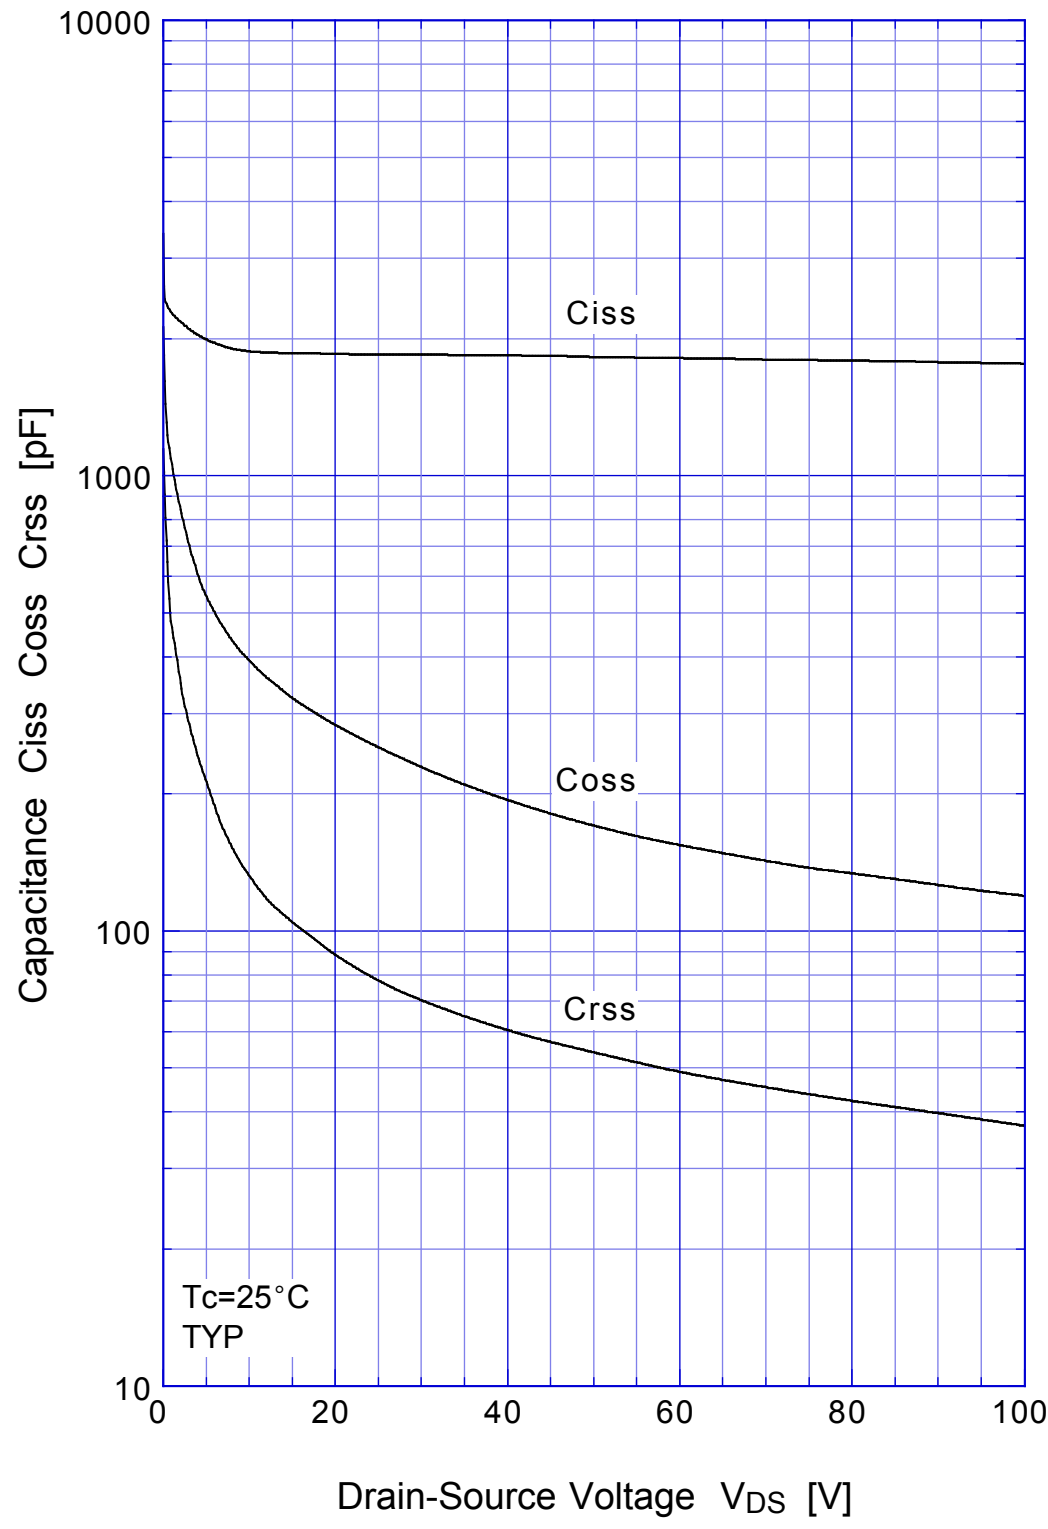




2SK2194

Power Derating

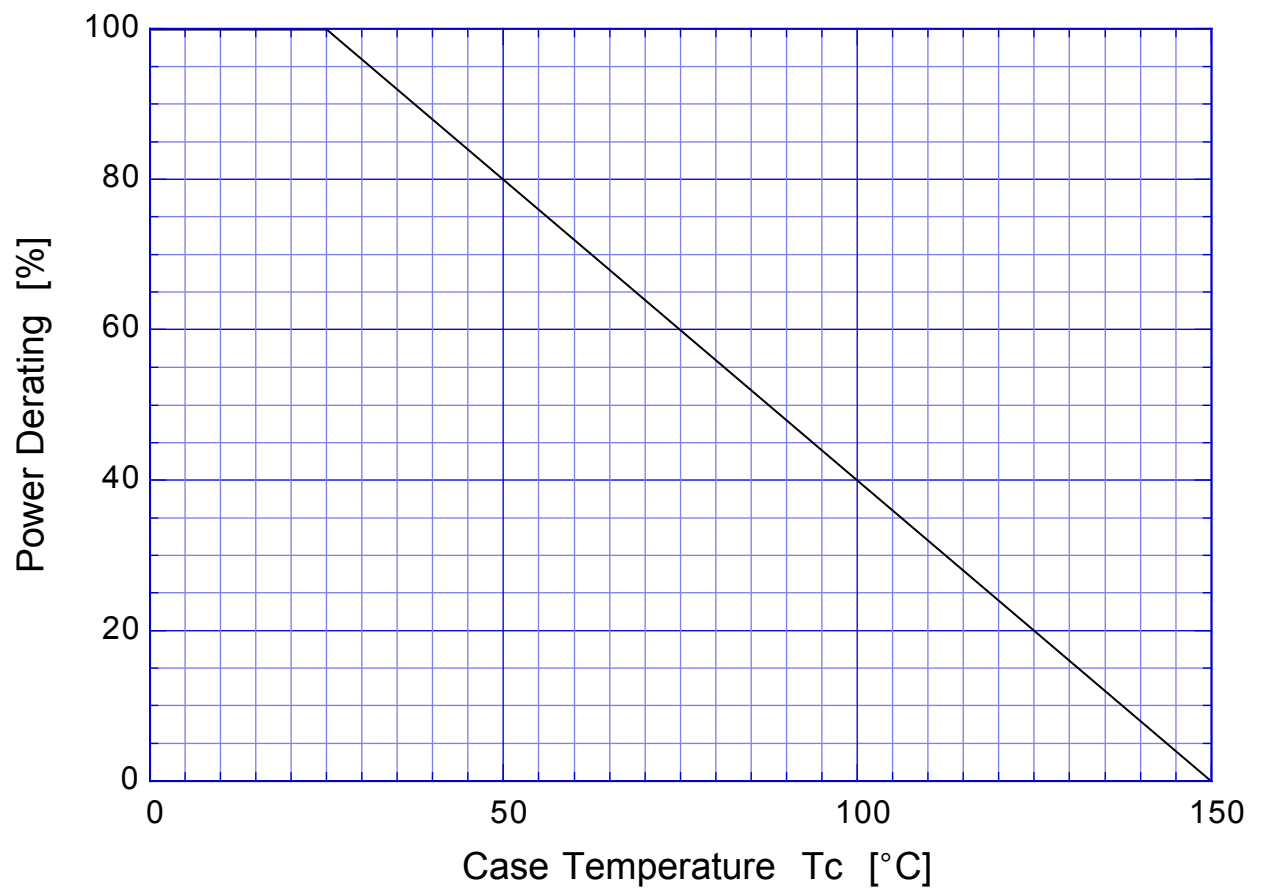

## 2SK2194

## Gate Charge Characteristics

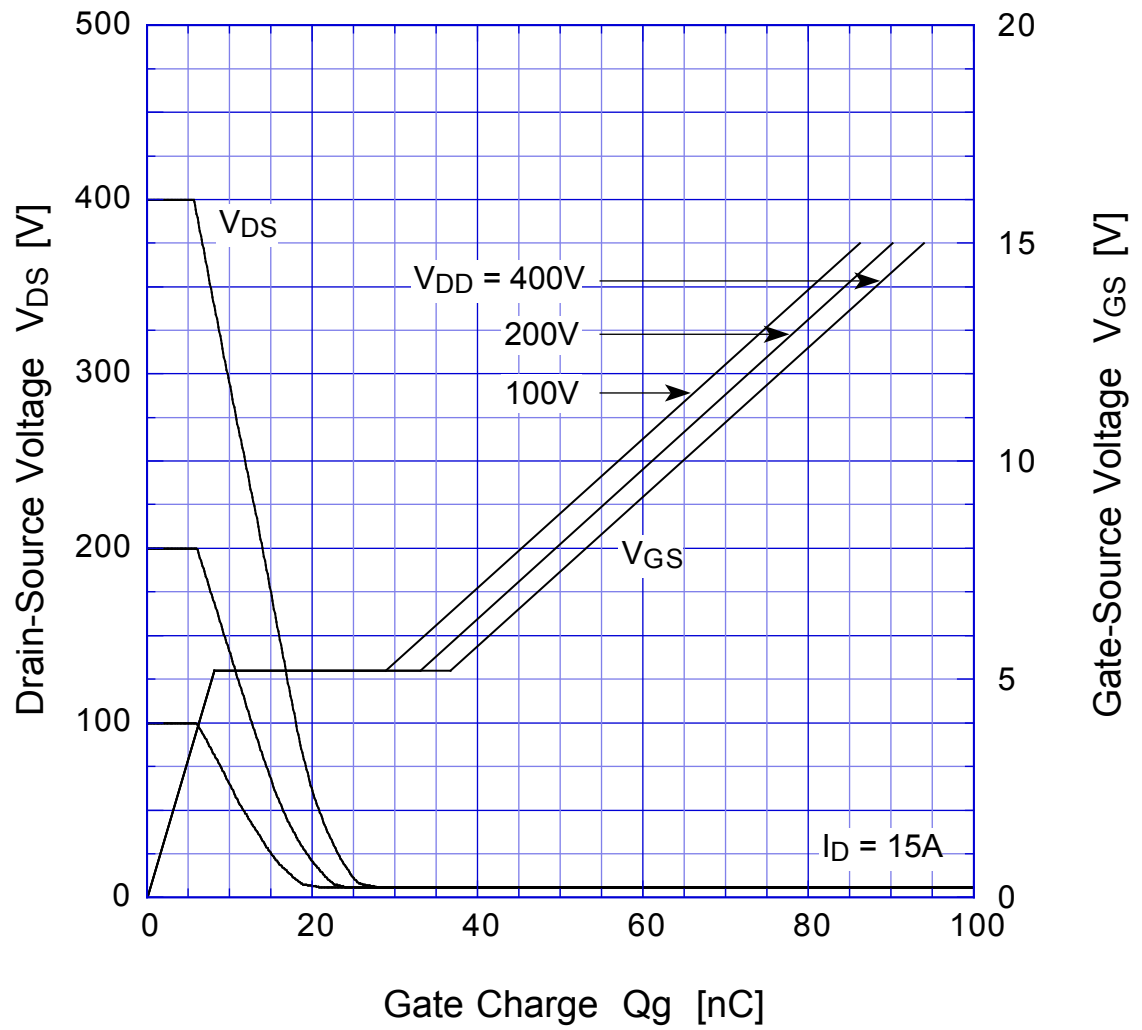

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.