

**TOSHIBA****20L6P45**

TOSHIBA RECTIFIER MODULE SILICON DIFFUSED TYPE

# 20L6P45

THREE PHASE FULL WAVE BRIDGE APPLICATIONS

INVERTER EQUIPMENT FOR AC MOTOR CONTROL

CHOPPER EQUIPMENT FOR DC MOTOR CONTROL

DC SUPPLY FOR BATTERY

OTHER POWER CONVERSION EQUIPMENT

- Repetitive Peak Reverse Voltage :  $V_{RRM}=800V$
- Average Output Rectified Current :  $I_O=20A$
- Isolation Voltage :  $V_{Isol}=2000V$  AC 60s
- Single In-line Package

MAXIMUM RATINGS ( $T_a=25^{\circ}C$ )

CHARACTERISTIC	SYMBOL	RATING	UNIT
Repetitive Peak Reverse Voltage	$V_{RRM}$	800	V
Average Output Rectified Current ( $T_c=105^{\circ}C$ )	$I_O$	20	A
Peak One Cycle Surge Forward Current (Non-Repetitive)	$I_{FSM}$	300 (50Hz) 330 (60Hz)	A
Junction Temperature	$T_j$	$-40\sim150$	$^{\circ}C$
Storage Temperature	$T_{stg}$	$-40\sim125$	$^{\circ}C$
Screw Torque (Note 1)	—	1.5	N·m
Isolation Voltage (AC, $t=60s$ )	$V_{Isol}$	2000	V


Note 1 : Recommended torque 1.2 Nm

ELECTRICAL CHARACTERISTICS ( $T_a=25^{\circ}C$ )

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	MAX.	UNIT
Repetitive Peak Reverse Current	$I_{RRM}$ (Note 2)	$V_{RRM}=800V$	—	100	$\mu A$
Peak Forward Voltage	$V_{FM}$ (Note 2)	$I_{FM}=20A$	—	1.2	V
Thermal Resistance	$R_{th(j-c)}$	DC (Total) (Junction-Case)	—	1.0	$^{\circ}C/W$
	$R_{th(j-a)}$	Free Convection (Junction-Ambient)	—	15	$^{\circ}C/W$

Note 2 : A value per rectifier unit.


Unit in mm

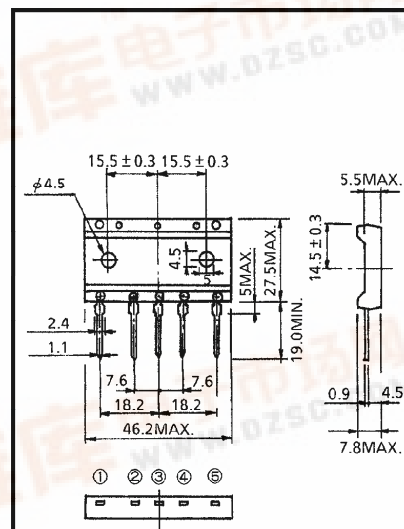

JEDEC	—
EIAJ	—
TOSHIBA	12-46A1A

Weight : 24g

CONNECTION



961001FAA2



● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

